







PREHUNGS

Qty	UNIT TYPE	R/O	WIDT H	HEIGHT	CORE	DOOR TYPE	JAMB WIDT H	JAMB TYPE	HINGE INFO	SWING	BM	NAFS / FIRE RATED	SPECIAL INSTRUCTION

SLABS & BIFOLDS

Qty	WIDT H	HEIGHT	CORE	DOOR TYPE

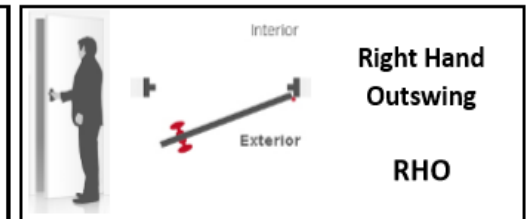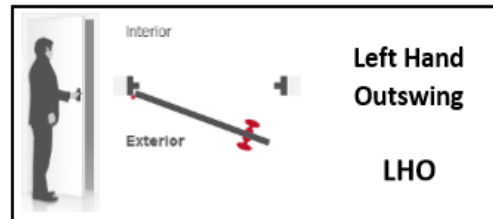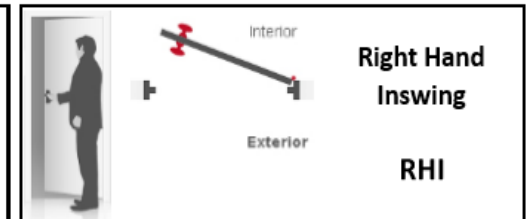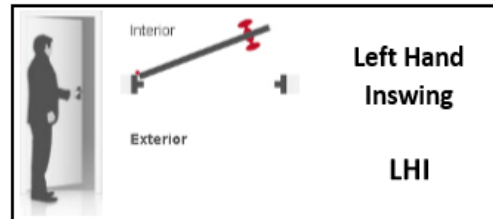



Alliance Abbotsford Standard Specs

All orders will be assumed to be Alliance Abbotsford Standard Specs unless otherwise specified. If machining is required outside of these standard specs, please request it in 'Special Instruction' column. Machine setup charges and additional lead times may apply.

HINGES	Radius
	# of Hinges
	Hinge Size
	Hinge Finish
	Hinge 1 (to top of door)
	Hinge 2 (to top of door)
	Hinge 3 (to top of door)
	Hinge 4 (to top of door)

1-3/8" Moulded Slabs H8/P8		
6/8	7/0	8/0
5/8"	5/8"	5/8"
3	3	4
3-1/2"	3-1/2"	3-1/2"
C2G	C2G	C2G
7"	7"	7"
38-1/4"	38-1/4"	33-1/8"
69-1/2"	69-1/2"	59-3/8"
n/a	n/a	85-1/2"

1-3/8" Flush Slabs H8/P8		
6/8	7/0	8/0
5/8"	5/8"	5/8"
3	3	4
3-1/2"	3-1/2"	3-1/2"
C2G	C2G	C2G
7"	7"	7"
38-1/4"	38-1/4"	33-1/8"
69-1/2"	69-1/2"	59-3/8"
n/a	n/a	85-1/2"

1-3/4" Moulded Slabs P4/P20		
6/8	7/0	8/0
5/8"	5/8"	5/8"
3	3	4
4"	4"	4"
C2G	C2G	C2G
6-1/2"	8-1/2"	8-1/2"
37-1/2"	39-3/4"	33-1/4"
68-1/2"	71"	58-3/4"
n/a	n/a	83-1/2"

1-3/4" Steel/Fiberglass Exterior		
79"	83"	95"
5/8"	5/8"	5/8"
3	3	4
4"	4"	4"
C2G	C2G	C2G
6-1/2"	8-1/2"	8-1/2"
37-1/2"	39-3/4"	33-1/4"
68-1/2"	71"	58-3/4"
n/a	n/a	83-1/2"

BORING	Handle/Deadbolt Bore
	Deadbolt (from top down)
	Handle (from top down)
	Backset
	Edge Bore

2-1/8"	2-1/8"	2-1/8"
38-1/2"	42-1/2"	54-1/2"
44"	48"	60"
2-3/8"	2-3/8"	2-3/8"
1" DI	1" DI	1" DI

2-1/8"	2-1/8"	2-1/8"
38-1/2"	42-1/2"	54-1/2"
44"	48"	60"
2-3/8"	2-3/8"	2-3/8"
1" DI	1" DI	1" DI

2-1/8"	2-1/8"	2-1/8"
38-1/2"	42-1/2"	54-1/2"
44"	48"	60"
2-3/8"	2-3/8"	2-3/8"
1" DI	1" DI	1" DI

2-1/8"	2-1/8"	2-1/8"
38-1/2"	42-1/2"	54-1/2"
44"	48"	60"
2-3/8"	2-3/8"	2-3/8"
1" DI	1" DI	1" DI

Spring-Loaded Hinges are standard on all P20 (20min fire-rated) slabs. 2 spring-loaded hinges per door (top & bottom). Standard hinge used in middle.

Viewer preps are assumed to be 9/16" diameter. 20" FTD of 6/8, 24" FTD of 7/0, and 36" FTD of 8/0



Pemberton Valley Building Centre

sales@pembertonvalleyhardware.com - 604-894-6240 ext 1

7300 Industrial Way, Pemberton, BC V0N 2L0